



H14 TX

H16 TPX

Exceptional productivity

- Full proportional controls and simultaneous boom functions
- Continuous 360° turntable rotation

Outstanding rough terrain driving features

- Hydraulic differential lock
- 4 wheel drive
- 35 cm ground clearance

10.7 and 12.3 metre outreach provides a large working envelope



Haulotte 
GROUP

More than lifting






H14 TX / H16 TPX

ROUGH TERRAIN TELESCOPIC BOOMS

TECHNICAL DATA

	H14 TX	H16 TPX
Working height	14.07 m	15.44 m
Platform height	12.07 m	13.44 m
Horizontal outreach	10.7 m	12.3 m
Lift capacity	230 kg	230 kg
F x G Platform size	2.3 x 0.8 m	1.8 x 0.8 m
A Length - stowed	7.6 m	8.43 m
H Length - storage	7.6 m	6.72 m
B Width	2.3 m	2.3 m
C Height - stowed	2.2 m	2.2 m
J Height - storage	2.2 m	2.5 m
Vertical jib rotation	N/A	140° (+70/-70)
Platform rotation	180° (+90/-90)	180° (+90/-90)
Boom rotation angle	+75°/-13°	+75°/-13°
Turntable rotation	360°	360°
Tailswing	85 cm	85 cm
D Wheelbase	2 m	2 m
E Ground clearance	35 cm	35 cm
Tilt	5°	5°
Drive speed	0.8 - 6 km/h	0,8 - 6 km/h
Gradeability	50 %	50 %
Turning radius - outside	4.5 m	4.5 m
Tires - foam-filled	14-17.5	14-17.5
Engine	31,2 kW – 42,4 hp	31,2 kW - 42,4 hp
Weight	5900 kg	6800 kg


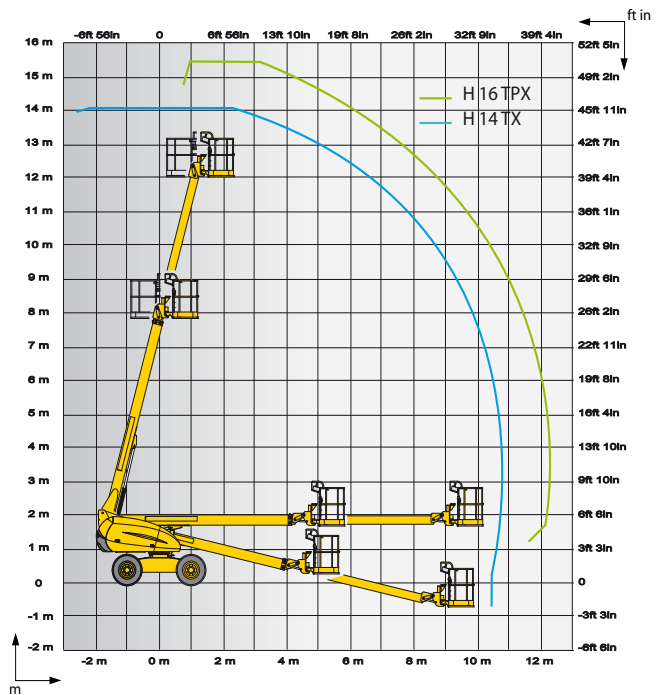


STANDARD EQUIPMENT

- 4 wheel drive
- 5° tilt alarm
- 12 V electrical control system
- 12 V – 95 Ah – 450 A battery
- Load limiter in cage
- Free wheeling device
- horn
- Battery electric emergency control in cage
- Hourmeter
- Slewing block pin
- Towing hooks / lifting eyes
- 2 hooks for safety harnesses in platform

OPTIONS AND ACCESSORIES

- H 16 TPX: larger platform: 2.3 m x 0.8 m
- Power to platform
- Rotating beacon
- Working light
- Motion alarm
- Biodegradable oil
- Catalytic exhaust
- 3.3 kW on-board generator
- Cold weather kit
- Hydraulic oil for hot countries

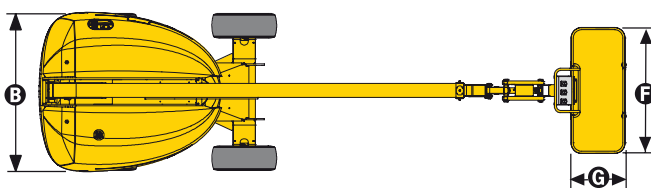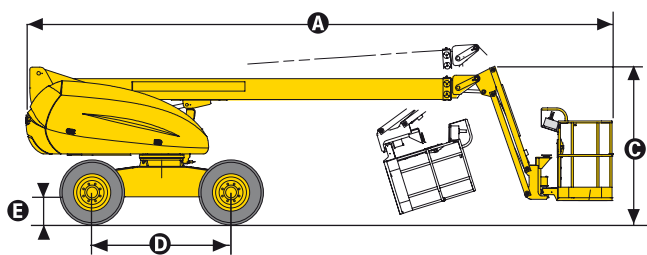

2420604470 - We reserve the right to modify the technical characteristics of this document without notice - 01/2014