

# UNITED

Forklift and  
Access Solutions



## ELEVAH® 65 MOVE picking

ELEVAH® 65 MP is indispensable for picking activities in retail stores and warehouses with its 6.5m working height giving it the best lift height in its class.



### Cost Effective Solution

The 65 MP optimises costs and space in the warehouse thanks to its working height of 6.5m allowing higher picking activities.



### Safer and Productive

Increases employee safety by eliminating falls experienced through conventional ladders, as well as maximises productivity by doing picking activities faster.



### Highly Manoeuvrable

Drivable at full height, the 65 MP delivers a quick driving speed and tight turning circle.

### Two Picking Platforms

The 65 MP offers a large, height adjustable electric platform with a 100 kg load capacity, as well as a large fixed platform for maximum storage.

### Ideal Usage

- › Retail
- › Hardware
- › Warehousing
- › Automotive
- › Workshops
- › Hospitals
- › Electrical
- › Trade Shows



### Watch the video



Use a mobile phone QR reader to scan the code



Or click the barcode




UNITED It's all about you

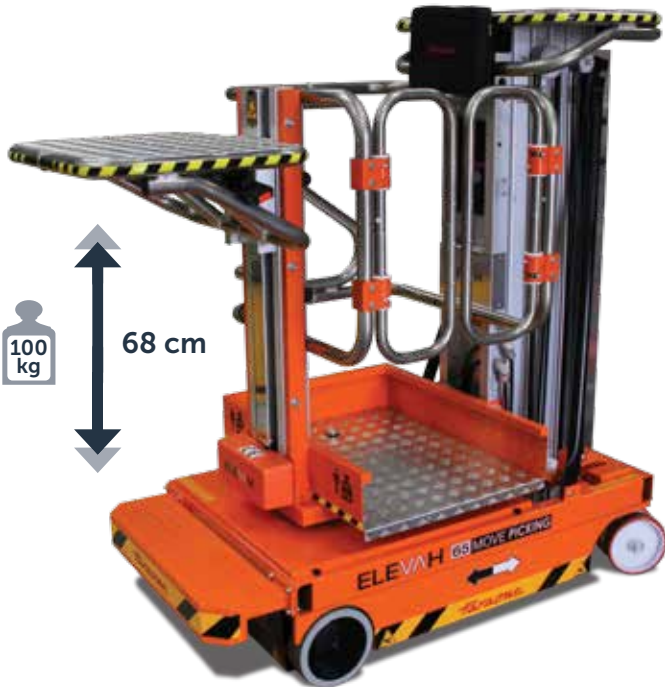

## Specifications

Max capacity		200 kg
Number of people		1
Use		internal
A	Closed machine height	1720 mm
B	Min.height from the ground to the platform level	420 mm
C	Maximum height from the ground to the platform level	4700 mm
D	Base overall dimensions	1280 mm
E		1720 mm
F		780 mm
G	Cage inner dimensions	550 mm
H		700 mm
I	Picking platform	510 mm
J		720 mm
K	Storage tray	420 mm
L		720 mm
Capacity of storage tray		20 kg
Machine weight		720 kg
Power supply		24 V
N° 2 12V Pb Acid Batteries		105 Ah
Battery charger		110V - 220V
Climbing ability at height		2,5%
M	Maximum climbing ability	15%
Drive wheels dimension		Ø 220 x 65
Swivel wheels dimensions		Ø 200 x 50
Turning radius		1095 mm
Maximum rising speed		0,2 m/s
Maximum descending speed		0,15 m/s
Maximum shifting speed		1,0 m/s
Maximum shifting speed at height		0,22 m/s
Max. elevation of self-propulsion when raised		
N	Maximum pressure for wheel at full load	3,20 kN*
Working cycles (with charged batteries)		130**

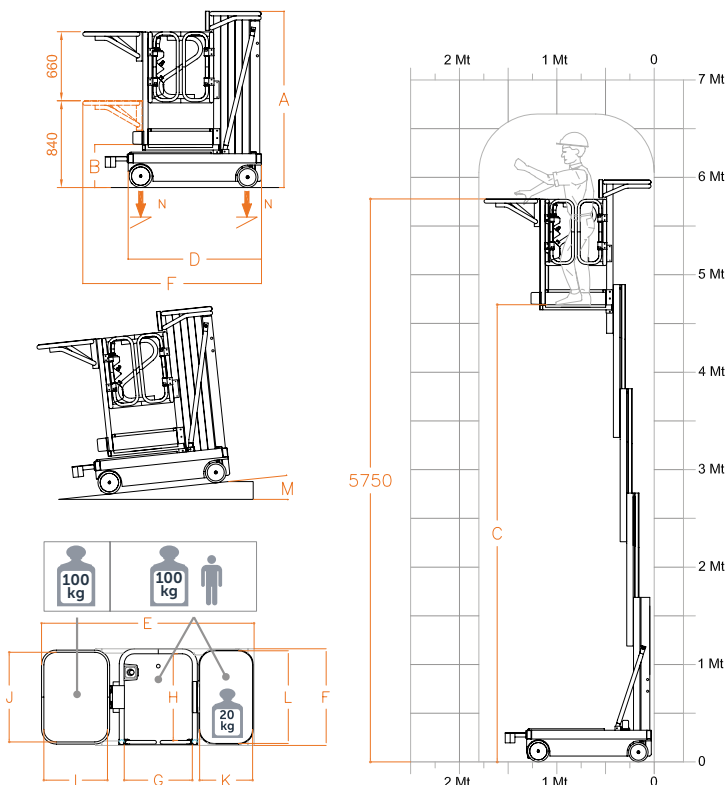

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.